


ROBOT ADAPTOR CONNECTOR
DB-25P-NR

SPRING PIN INTERFACE


TOOLING ADAPTOR CONNECTOR
DB-25S-NR

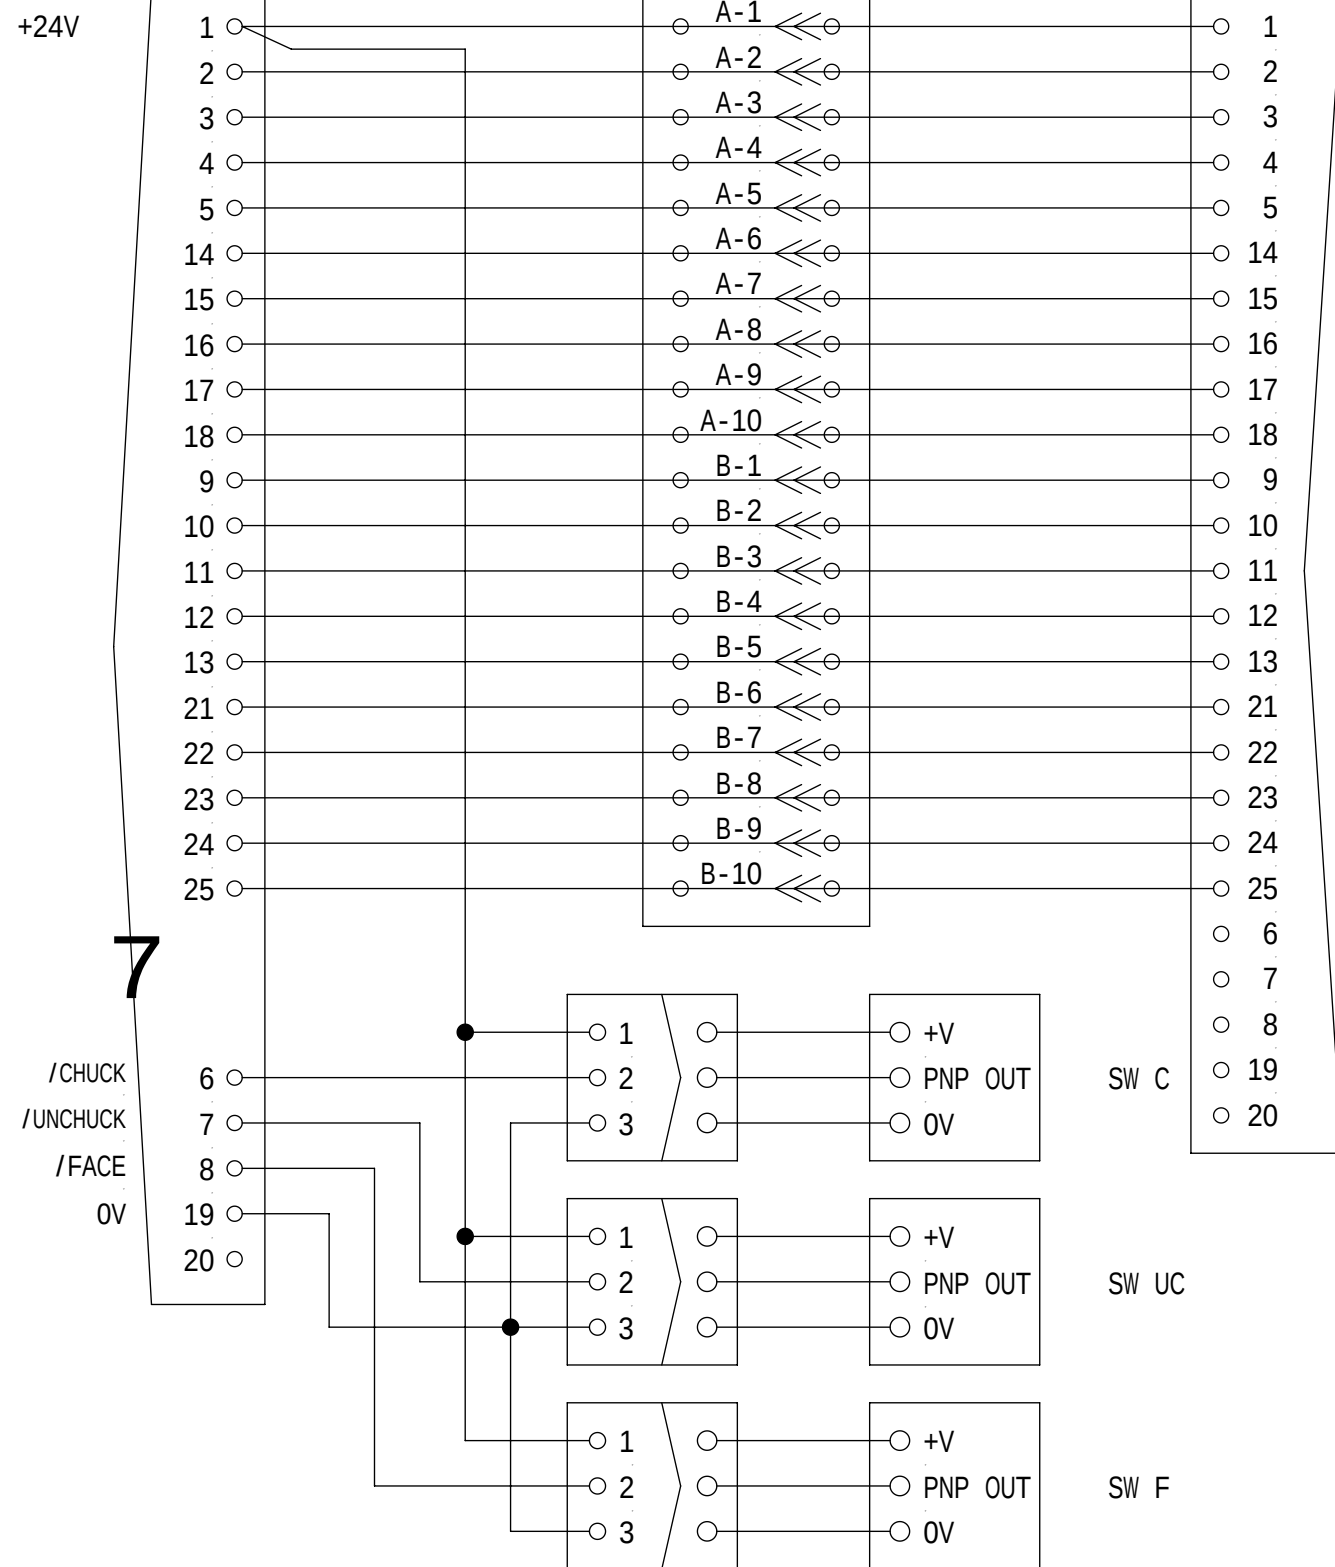


ATC — ON OFF
THE ON/OFF STATUS FOR VARIOUSMODE OF THE ATC

	CHUCK SIGNAL	UNCHUCK SIGNAL	FACE SIGNAL
ATC () UNCHUCK	OFF	ON	OFF
ATC () UNCHUCK	OFF	ON	ON
ATC () CHUCK	ON	OFF	ON

C:
C:CHUCK
U:
U:UNCHUCK
F:
F:FACE

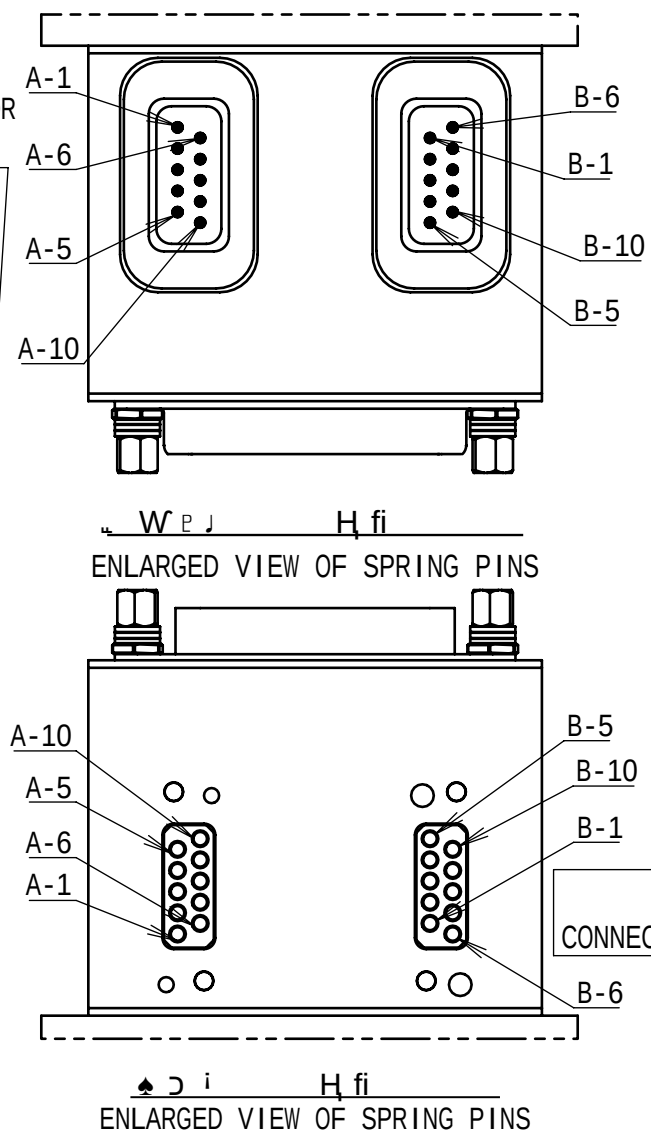

1. ≡ N.O. ≠ N.C.
2. DC24V ≡ ≠ N.C.
NOTE
1.ALL THE SWITCHES ARE COMFORMED TO THE N.O.SPECIFICATION.
2.THIS MACHINE IS DC24V SOURCE OUTPUT TYPE.

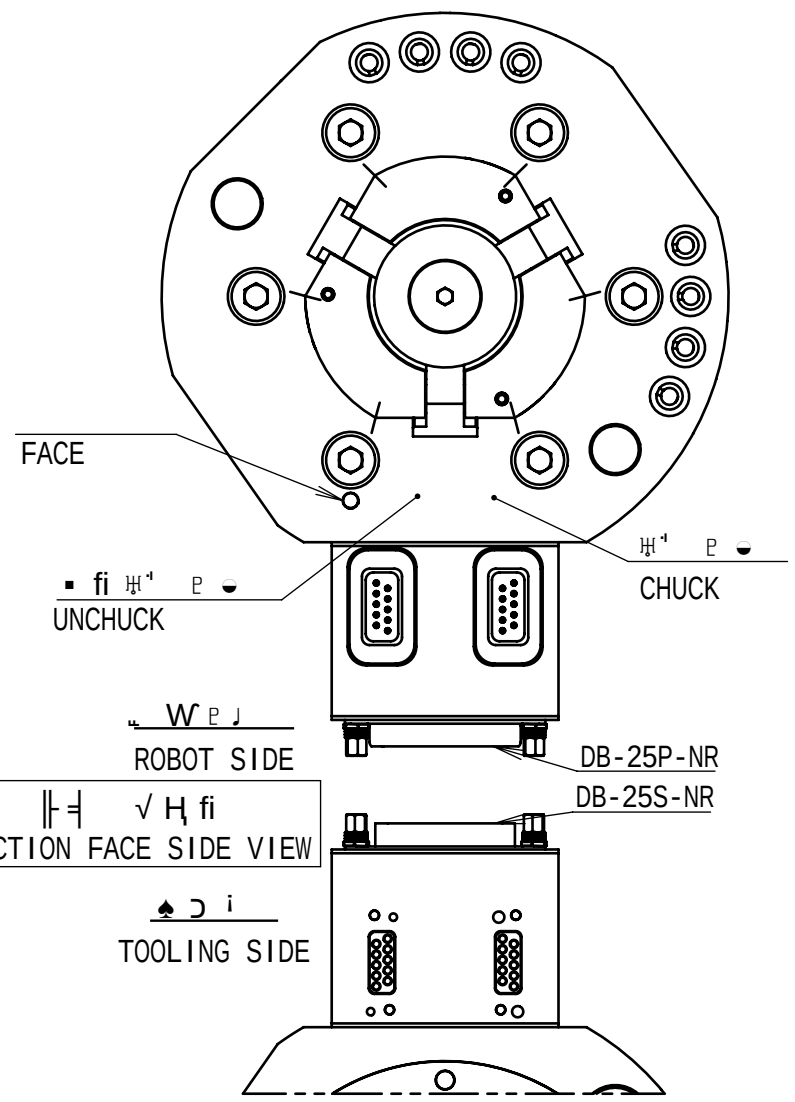

TITLE	NITTAOMEGA type M100-S		(PNP)	
	WIRING DIAGRAM(PNP OUTPUT)			
AHH-W0000				
DOC No.	T20250325-3-0		DATE	2025/03/26
 NITTA ニッタ株式会社 NITTA CORPORATION				